


zenit M

Strahler | Spotlight | Projecteur | Proiettore

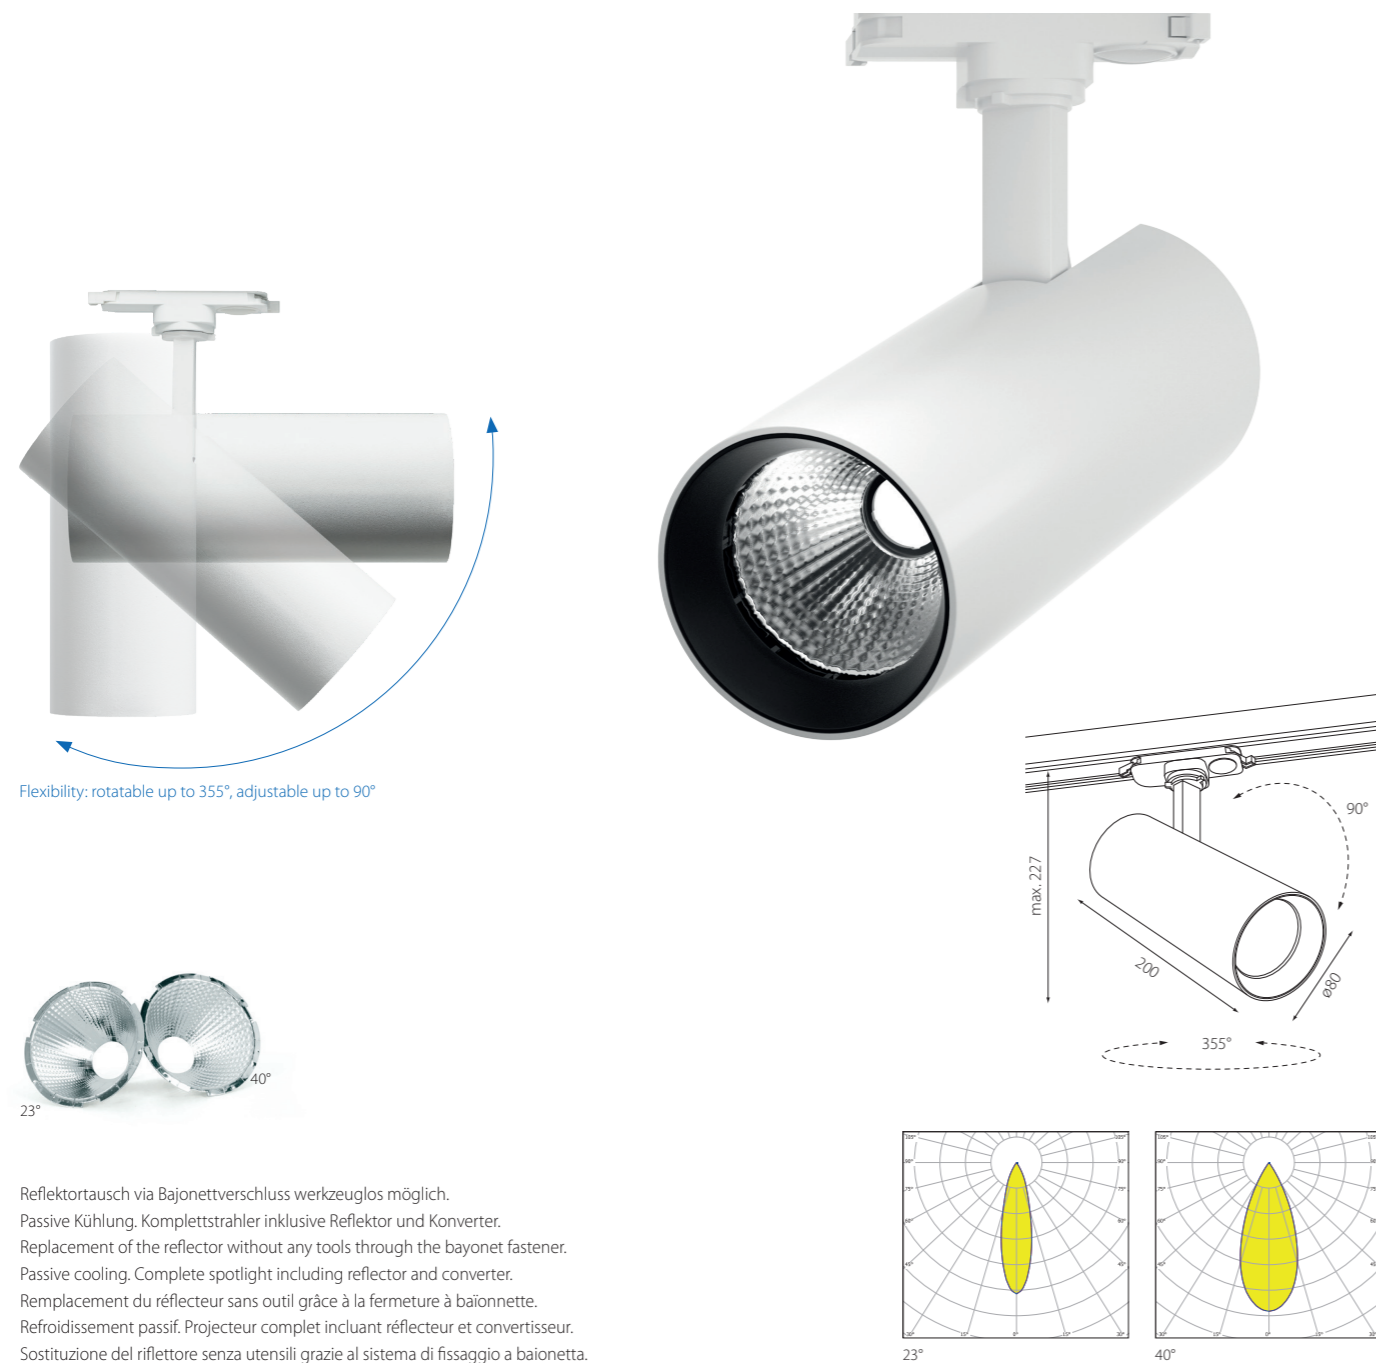

Housing

Powder coated die-cast aluminium

230V IP20 R_a>80/90 up to L90/50.000h MacAdam 3 DALI



LED

2700K, 3000K, 3500K, 4000K
 Food & Fashion | Aliments & Mode

up to 122 lm/W

R_a>80/90, MacAdam 3

non-dim / DALI dim

Blue light hazard: RG≤1 IEC 62471

Lifetime

up to L90/50.000h

Optic

Reflector: 23°, 40°

Options

Honeycomb glare protection, Oval spot lens, Clear protective glass, Blur glass

Flexibility

rotatable up to 355°, adjustable up to 90°



zenit M Strahler | Spotlight | Projecteur | Proiettore

S10S200-1 C1 2 3 4 5

1 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

weiß | white | blanc | bianco

WSWS

schwarz | black | noir | nero

SWSW

2 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

LF830 3000K	830
LF840 4000K	840
LF927 2700K	927
LF930 3000K	930
LF935 3500K	935
LF940 4000K	940
LF932 3250K Fashion	FAS
Backwaren Bakery goods Boulangerie Prodotti da forno	BAC
Fleisch Meat Boucherie Macelleria	FLE
Wurstwaren Sausage products Charcuterie Salumeria	WUR
Fisch Fish Poissonnerie Pescheria	FIS

3 Output

low output	L
medium output	M
high output	H
very high output	V

4 non-dim, DALI dim

non-dim	1
DALI Eutrac 3	3
DALI Global pulse	G

5 Reflektor | Reflector | Réflecteur | Riflettore

23°	2
40°	4

Beispiel | Example | Exemple | Esempio

weiß | white | blanc, LF940, high output, DALI dim, 23°

S10S200-WSWSC1940H32

Luminous Flux (lm)	low output				medium output				high output				very high output			
	23°	23°	23°	23°	40°	40°	40°	40°	40°	40°	40°	40°	40°	40°	40°	
LF830 3000K	1013 lm	1254 lm	1810 lm	2407 lm	1005 lm	1243 lm	1787 lm	2377 lm								
LF840 4000K	1102 lm	1360 lm	1956 lm	2601 lm	1060 lm	1324 lm	1948 lm	2590 lm								
LF927 2700K	716 lm	884 lm	1269 lm	1732 lm	697 lm	865 lm	1259 lm	1728 lm								
LF930 3000K	782 lm	970 lm	1409 lm	1919 lm	771 lm	956 lm	1386 lm	1889 lm								
LF935 3500K	776 lm	964 lm	1407 lm	1926 lm	767 lm	953 lm	1392 lm	1889 lm								
LF940 4000K	813 lm	1009 lm	1465 lm	2012 lm	799 lm	993 lm	1449 lm	1983 lm								

Luminous Flux (lm) Special LED modules	low output				medium output				high output				very high output			
	23°	23°	23°	23°	40°	40°	40°	40°	40°	40°	40°	40°	40°	40°	40°	
Backwaren Bakery goods Boulangerie	574 lm	708 lm	1013 lm	1350 lm	568 lm	699 lm	993 lm	1317 lm								
Fleisch Meat Boucherie	555 lm	685 lm	982 lm	1306 lm	551 lm	678 lm	963 lm	1281 lm								
Wurstwaren Sausage products Charcuterie	538 lm	659 lm	930 lm	1229 lm	521 lm	644 lm	925 lm	1218 lm								
Fisch Fish Poissonnerie	807 lm	1001 lm	1454 lm	1966 lm	788 lm	978 lm	1421 lm	1913 lm								
Fashion (LF932 3250K)	775 lm	958 lm	1375 lm	1829 lm	757 lm	936 lm	1344 lm	1787 lm								

System Power (W)	low output				medium output				high output				very high output				Weight (kg)
	zenit M	9W	12W	17,5W	25W	zenit M	1,0kg										

Optionales Zubehör | Optional accessory | Accessoire optionnel | Accessori opzionali

Blendschutz-Wabenraster Honeycomb glare protection Filtre anti-éblouissement nid d'abeilles Filtro anti-abbagliamento a nido d'ape	S10-BLE-80
Ovalzeichnerlinse Oval spot lens Lentille ovalisante Lenti ovalizzanti	S10-OZL-80
Klares Schutzglas Clear protective glass Verre de protection transparent Vetro di protezione trasparente	S10-SGL-80
Weichzeichnerglass Blur glass Verre effet flou Vetro con effetto sfocatura	S10-WGL-80

