





pure 2 IP54

Aufbauleuchte | Surface-mount luminaire | Luminaires en saillie | Apparecchio a plafone

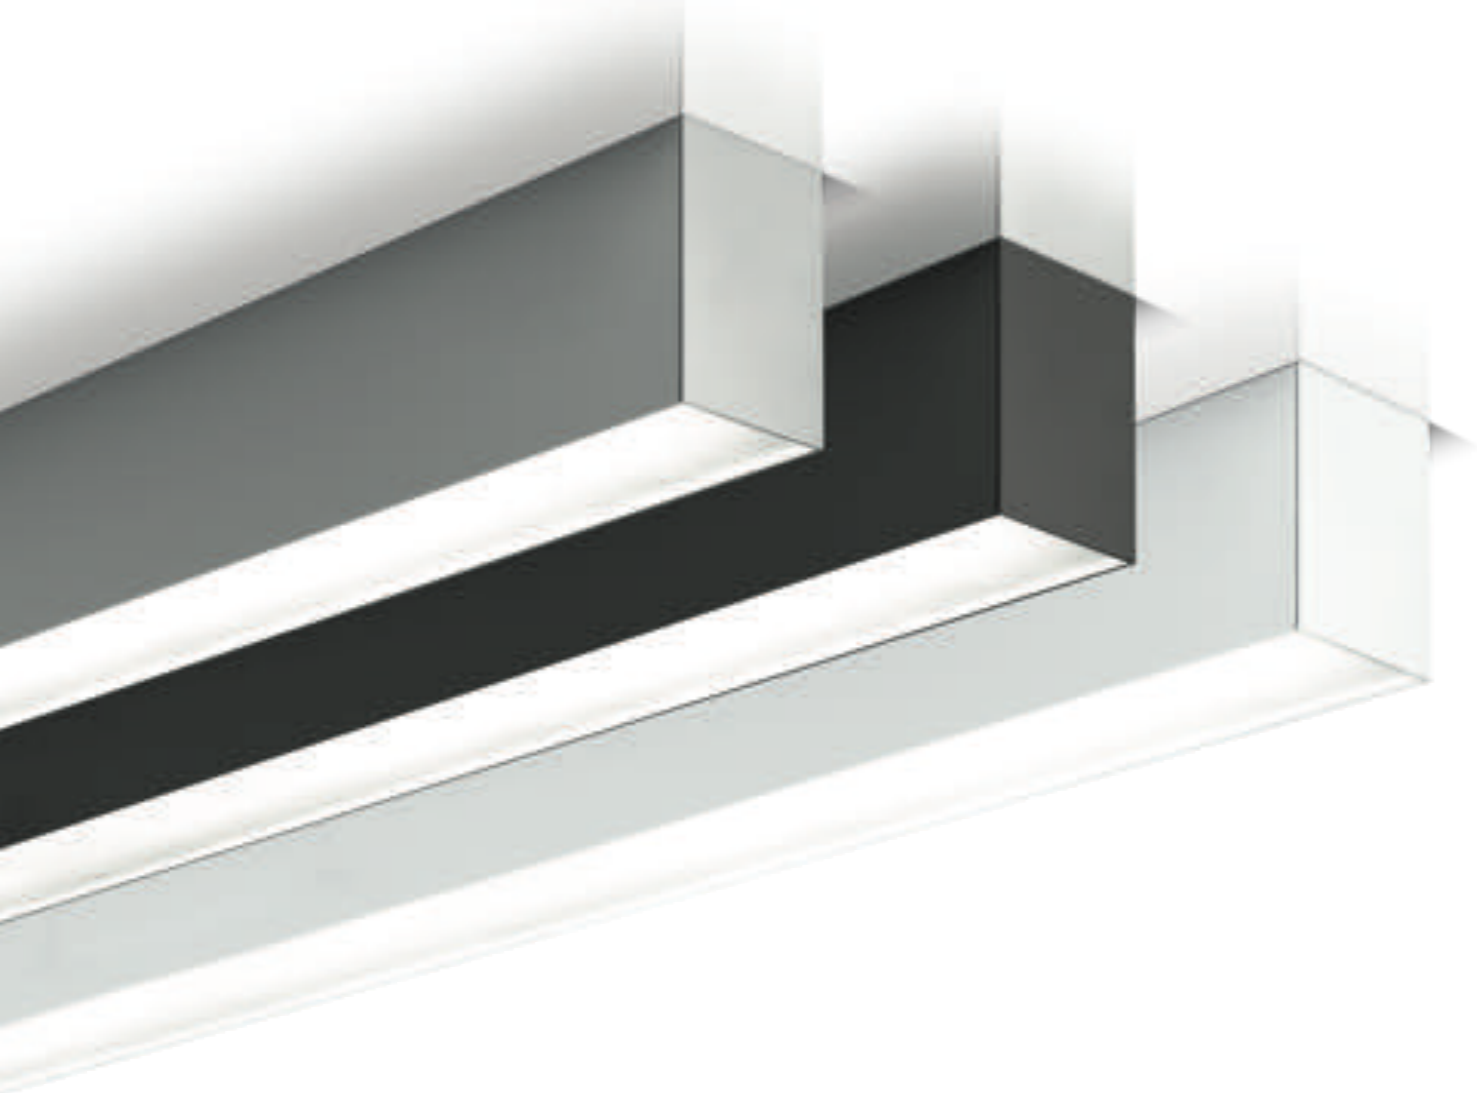

A++ A 230V IP54 $R_a > 80$ up to L90/50.000h MacAdam 3 DALI switchDIM

<p>LED</p> <p>3000 K, 4000 K, dynamic white</p> <p>up to 94 lm/W, up to 2706 lm/m</p> <p>$R_a > 80$, MacAdam 3</p> <p>non-dim/DALI</p> <p>IEC 62471: Blue light hazard: RG≤1</p> <p>Lifetime up to L90/50.000h</p>	<p>Optic</p> <p>direct</p> <p>satiné</p>	<p>Options</p> <p>RAL of your choice (p. 449)</p>	<p>Housing</p> <p>powder coated</p> <p>RAL 9006 </p> <p>RAL 9016 </p> <p>RAL 9005 </p>
---	---	--	---



pure 2 IP54

P58A 1-2 Q1 3 4 S

<p>1 Länge Length Longueur Lunghezza</p> <table border="1"> <tr><td>600 mm</td><td>060</td></tr> <tr><td>880 mm</td><td>088</td></tr> <tr><td>1160 mm</td><td>116</td></tr> <tr><td>1440 mm</td><td>144</td></tr> <tr><td>1720 mm</td><td>172</td></tr> <tr><td>2280 mm</td><td>228</td></tr> <tr><td>2840 mm</td><td>284</td></tr> <tr><td>3400 mm</td><td>340</td></tr> <tr><td>4520 mm</td><td>452</td></tr> </table>	600 mm	060	880 mm	088	1160 mm	116	1440 mm	144	1720 mm	172	2280 mm	228	2840 mm	284	3400 mm	340	4520 mm	452	<p>3 Farbtemperatur Colour temperature Température de couleur Temperatura colore</p> <table border="1"> <tr><td>3000 K</td><td>830</td></tr> <tr><td>4000 K</td><td>840</td></tr> <tr><td>2700 - 6500 K dynamic white</td><td>HCL</td></tr> </table>	3000 K	830	4000 K	840	2700 - 6500 K dynamic white	HCL
600 mm	060																								
880 mm	088																								
1160 mm	116																								
1440 mm	144																								
1720 mm	172																								
2280 mm	228																								
2840 mm	284																								
3400 mm	340																								
4520 mm	452																								
3000 K	830																								
4000 K	840																								
2700 - 6500 K dynamic white	HCL																								
<p>2 Gehäusefarbe Housing colour Couleur du luminaire Colore profilo</p> <table border="1"> <tr><td>silber silver argent argento (RAL 9006)</td><td>9006</td></tr> <tr><td>weiß white blanc bianco (RAL 9016)</td><td>9016</td></tr> <tr><td>schwarz black noir nero (RAL 9005)</td><td>9005</td></tr> </table> <p>RAL colours on request (p. 449)</p>	silber silver argent argento (RAL 9006)	9006	weiß white blanc bianco (RAL 9016)	9016	schwarz black noir nero (RAL 9005)	9005	<p>4 Output</p> <table border="1"> <tr><td>low output non-dim</td><td>L1</td></tr> <tr><td>low output DALI</td><td>L3</td></tr> <tr><td>high output DALI</td><td>H3</td></tr> <tr><td>dynamic white</td><td>X3</td></tr> </table>	low output non-dim	L1	low output DALI	L3	high output DALI	H3	dynamic white	X3										
silber silver argent argento (RAL 9006)	9006																								
weiß white blanc bianco (RAL 9016)	9016																								
schwarz black noir nero (RAL 9005)	9005																								
low output non-dim	L1																								
low output DALI	L3																								
high output DALI	H3																								
dynamic white	X3																								

Beispiel | Example | Exemple | Esempio
 600 mm, white, 4000 K, high output DALI, satiné
P58A060-9016Q1840H3S

Luminous Flux (lm)			System Power (W)			Weight (kg)	
4000 K satiné	high output	low output	high output	low output	dynamic white		
600 mm	1464 lm	800 lm	18 W	11 W	20 W	600 mm	2,3 kg
880 mm	2212 lm	1296 lm	26 W	16 W	29 W	880 mm	3,2 kg
1160 mm	2958 lm	2584 lm	34 W	20 W	36 W	1160 mm	4,0 kg
1440 mm	3644 lm	1964 lm	44 W	24 W	43 W	1440 mm	5,3 kg
1720 mm	4517 lm	2626 lm	51 W	28 W	51 W	1720 mm	6,1 kg
2280 mm	6115 lm	3422 lm	67 W	36 W	68 W	2280 mm	7,8 kg
2840 mm	7288 lm	3928 lm	84 W	48 W	86 W	2840 mm	10,4 kg
3400 mm	9034 lm	5252 lm	101 W	56 W	102 W	3400 mm	12,7 kg
4520 mm	12230 lm	9902 lm	135 W	73 W	136 W	4520 mm	15,6 kg

COMPARE LIGHT COLOUR

Luminous Flux (lm)	3000 K		4000 K		dynamic white
	high output	low output	high output	low output	2700 - 6500 K
1440 mm	3541 lm	1905 lm	3644 lm	1964 lm	2974 lm

