
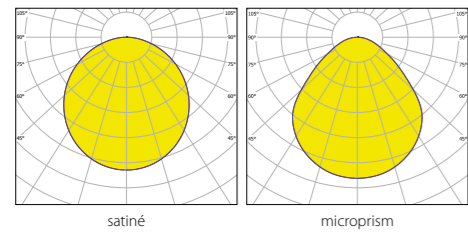


liha

Aufbauleuchte | Surface-mount luminaire | Luminaires en saillie | Apparecchio a plafone

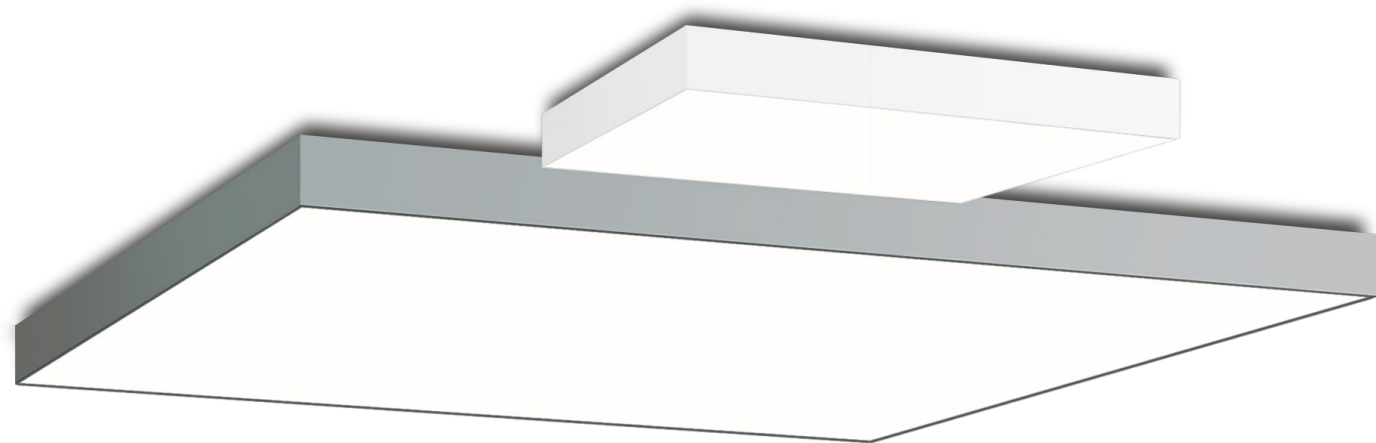


A++ A 230V IP20 IP54 R_a>80 up to L80/50.000h MacAdam 3 DALI switchDIM

LED
3000 K, 4000 K, dynamic white
up to 149 lm/W
R_a > 80, MacAdam 3
non-dim/DALI
IEC 62471: Blue light hazard: RG0
Lifetime up to L80/50.000h

Optic
direct
satiné
microprism for reduced brightness (LRA)

Options
Emergency lighting 3 h (p. 447)
RAL of your choice (p. 449)
Rod suspension (p. 246)

Housing
powder coated
RAL 9006
RAL 9016
RAL 9005



liha

F51A **1-2-3-4-5-6**

1 Dimension

310×310 mm	03Q
450×450 mm	04Q
600×600 mm	06Q
900×900 mm (IP20 only)	09Q
1200×1200 mm (IP20 only)	12Q

2 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

silber silver argent argento (RAL 9006)	9006
weiß white blanc bianco (RAL 9016)	9016
schwarz black noir nero (RAL 9005)	9005
RAL colours on request (p. 449)	

3 Schutzart | Protection rating | Indice de protection | Grado di protezione

IP20	C
IP54 (no Emergency lighting)	Q

4 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

3000 K	830
4000 K	840
2700 - 6500 K dynamic white	HCL

5 Output

low output non-dim	L1
low output DALI	L3
high output DALI	H3
dynamic white	X3

6 Diffusoren | Diffusers | Diffuseurs | Diffusori

satiné	S
microprism	M

Beispiel | Example | Exemple | Esempio

450×450 mm, white, IP54, 4000 K, high output DALI, satiné

F51A04Q-9016Q1840H3S

Luminous Flux (lm)

4000 K satiné	high output		low output	
	high output	low output	high output	low output
310×310 mm	2378 lm	1394 lm	2378 lm	1394 lm
450×450 mm	4457 lm	2697 lm	4457 lm	2697 lm
600×600 mm	9257 lm	4771 lm	9257 lm	4771 lm
900×900 mm	18079 lm	9416 lm	18079 lm	9416 lm
1200×1200 mm	30542 lm	15263 lm	30542 lm	15263 lm

System Power (W)

	high output		low output		dynamic white	
	high output	low output	high output	low output	high output	low output
310×310 mm	21 W	12 W	21 W	12 W	21 W	12 W
450×450 mm	35 W	20 W	35 W	20 W	35 W	20 W
600×600 mm	66 W	33 W	66 W	33 W	66 W	33 W
900×900 mm	124 W	63 W	124 W	63 W	124 W	63 W
1200×1200 mm	221 W	106 W	221 W	106 W	221 W	106 W

Weight (kg)

310×310 mm	4,6 kg
450×450 mm	6,1 kg
600×600 mm	11,1 kg
900×900 mm	17,7 kg
1200×1200 mm	25,1 kg

COMPARE LIGHT COLOUR

Luminous Flux (lm)	3000 K		4000 K		dynamic white	
	high output	low output	high output	low output	2700-6500 K	2097 lm
310×310 mm	2236 lm	1311 lm	2378 lm	1394 lm	2097 lm	2097 lm



COMPARE COVER

Luminous Flux (lm)	satiné		microprism	
	high output	low output	high output	low output
310×310 mm	2378 lm	1394 lm	2013 lm	1258 lm

