


meteor AB

Aufbaustrahler | Surface-mount spotlight | Projecteur en saillie | Faretto a plafone



Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.
Sostituzione del riflettore senza utensili.
Raffreddamento passivo. Proiettore completo incluso riflettore e convertitore.

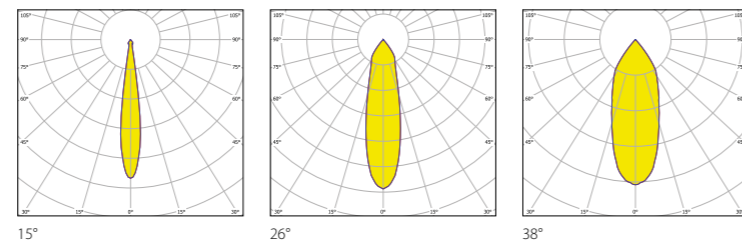

A++ A 230V IP20 R_a>80/90 up to L90/50.000h MacAdam 3 DALI

<p>LED</p> <p>2700K, 3000K, 3500K, 4000K Food & Fashion, dynamic white</p> <hr/> <p>up to 140 lm/W</p> <hr/> <p>R_a>80/90, MacAdam 3</p> <hr/> <p>non-dim / DALI</p> <hr/> <p>Blue light hazard: RGs1 IEC 62471</p>	<p>Optic</p> <p>Reflector: 15°, 26°, 38°</p> <hr/> <p>Flexibility</p> <p>rotatable up to 359°, adjustable up to 90°</p> <hr/> <p>Lifetime</p> <p>up to L90/50.000h</p>	<p>Options</p> <p>Honeycomb glare protection</p> <hr/>	<p>Housing</p> <p>powder coated</p> <p>silver </p> <p>white </p> <p>black </p>
---	---	---	---

meteor AB

S03A117-1 C1 2 3 4 5

1 Gehäusefarbe | Housing colour | Couleur du projecteur | Colore faretto

weiß white blanc bianco	WSWS
schwarz black noir nero	SWSW
silber silver argent argento	SISI

2 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

LF830 3000K	830
LF840 4000K	840
LF927 2700K	927
LF930 3000K	930
LF935 3500K	935
LF940 4000K	940
LF932 3250K Fashion	FAS
Backwaren Bakery goods Boulangerie Prodotti da forno	BAC
Fleisch Meat Boucherie Macelleria	FLE
Wurstwaren Sausage products Charcuterie Salumeria	WUR
Fisch Fish Poissonnerie Pescheria	FIS
Gemüse Vegetables Légumes Verdura	FRU

3 Output

low output	L
medium output	M
high output	H

4 non-dim, DALI, dynamic white

non-dim	1
DALI	3

5 Reflektor | Reflector | Réflecteur | Riflettore

15°	1
26°	2
38°	3

Beispiel | Example | Exemple | Esempio
black, LF840, low output, non-dim, 15°
S03A117-SWSWC1840L11

Luminous Flux (lm)	low output			medium output			high output		
	15°	15°	15°	26°	26°	26°	38°	38°	38°
LF830 3000K	2587 lm	3245 lm	3849 lm	2729 lm	3428 lm	4071 lm	2727 lm	3427 lm	4072 lm
LF840 4000K	2726 lm	3426 lm	4072 lm	2880 lm	3626 lm	4317 lm	2874 lm	3617 lm	4305 lm
LF927 2700K	2104 lm	2645 lm	3144 lm	2230 lm	2802 lm	3330 lm	2222 lm	2794 lm	3322 lm
LF930 3000K	2220 lm	2798 lm	3335 lm	2392 lm	3008 lm	3577 lm	2387 lm	3003 lm	3571 lm
LF935 3500K	2288 lm	2890 lm	3454 lm	2461 lm	3107 lm	3711 lm	2653 lm	3277 lm	3821 lm
LF940 4000K	2311 lm	2907 lm	3458 lm	2487 lm	3124 lm	3711 lm	2482 lm	3121 lm	3711 lm
FAS (LF932 3250K)	1932 lm	2473 lm	2996 lm	2031 lm	2596 lm	3140 lm	2027 lm	2593 lm	3138 lm
BAC	1306 lm	1664 lm	2008 lm	1377 lm	1748 lm	2099 lm	1376 lm	1748 lm	2102 lm
FLE	1310 lm	1671 lm	2017 lm	1379 lm	1753 lm	2109 lm	1378 lm	1752 lm	2108 lm
WUR	1263 lm	1614 lm	1952 lm	1327 lm	1690 lm	2036 lm	1323 lm	1686 lm	2034 lm
FIS	2048 lm	2621 lm	3176 lm	2153 lm	2752 lm	3328 lm	2149 lm	2748 lm	3326 lm
FRU	1935 lm	2439 lm	2908 lm	2031 lm	2548 lm	3023 lm	2019 lm	2534 lm	3006 lm

System Power (W)

	low output	medium output	high output
meteor	20W	26W	31W

Weight (kg)

meteor AB	1,9kg
-----------	-------

Optionales Zubehör | Optional accessory | Accessoire optionnel | Accessori opzionali

Blendschutz-Wabenraster | Honeycomb glare protection | Filtre anti-éblouissement nid d'abeilles | Filtro anti-abbagliamento a nido d'ape **S03-BLE-99**

