

Item

P-Z1S-GSSI830L11
zenit S integrated profile surface spotlight

General

LED LO 3000K 7,3W 820lm 16°
suitable for pure3/p.forty
1 spot, anti-glare cone gold, housing black
blind cover 400 mm silver

Illuminant

LED LO
EEC A+
Colour rendering index (CRI) > 80
Blue light hazard RG1 IEC 62471
MacAdam 3

Dimension

LxWxH: 100x58x100mm
DMxH: 0058x100mm

Surface/Colour

black
aluminium

Lens

Radiation angle: 16°

Protection rating



IP20 / Protection class I

Connection

230V 50/60Hz
incl. converter

Weight

1,0 kg

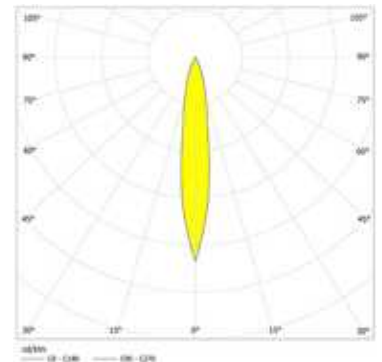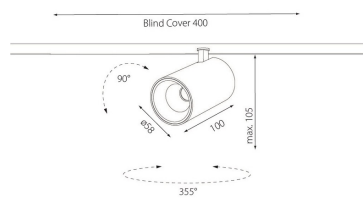

Product-Information

Integrated profile surface spotlight with black surface in a fine structure, suitable for pure3/p.forty. The set includes 1 spot, anti-glare cone gold, housing black, as a modular component fitting in a pure3 profile with a blind cover 400 mm silver included, particularly designed for lighting sales and presentation areas. Emission characteristic of 16°, with passive cooling. Replacement of the anti-glare cone without any tools with a bayonet fastener. Colour temperature of 3000 K. Latest generation of LED technology with an efficiency of 112 lm per W and a luminous flux of 820 lm with 7,3 W, converter included. Colour Rendering Index (CRI) > 80, small colour tolerance of MacAdam 3. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], blue light hazard RG1 IEC 62471. Ingress Protection IP20, protection class I. A honeycomb glare protection, an oval spot lens, a clear protective glass or a blur glass is optionable. Dimensions: length of housing 100 mm, diameter 58 mm, maximum height 105 mm, arrangement of the spot in the middle, Weight: 0,95 kg