

**Item**

P58A060-9005Q1HCLX3S  
pure2 surface luminaire black 600x70

**General**

LED HCL 2700 - 6500K 20W 1182lm DALI DT8  
incl. endcaps, Install only in protected outdoor  
areas!  
2 mounting clips

**Illuminant**

LED HCL  
EEI A++ - A  
Colour rendering index (CRI) > 80  
Blue light hazard RG0 IEC 62471  
MacAdam 3

**Dimension**

LxWxH: 600x70x100mm  
Cut-out LxWxD: 605x75x135mm

**Surface/Colour**

RAL9005 black fine matte finish  
Material: aluminium profile

**Lens**

diffuser polycarbonate LED IP54

**Protection rating**




IP54 / Protection class I

**Connection**

230V 50/60Hz  
incl. converter DALI

**Weight**

2,3 kg

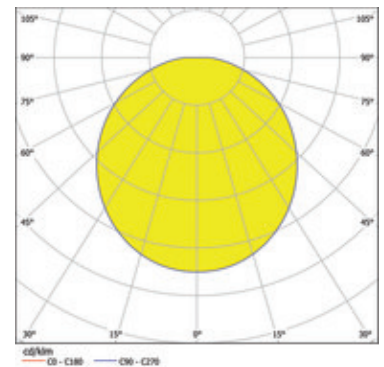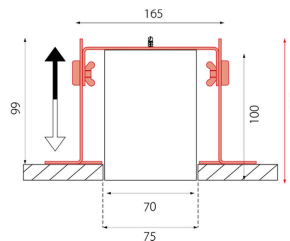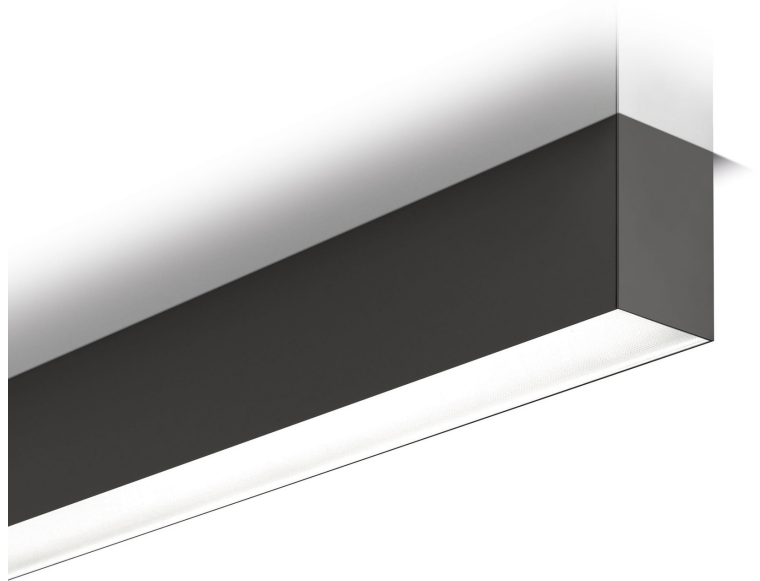

**Product-Information**