

Item

P58A060-9016Q1HCLX3S
pure2 surface luminaire white 600x70

General

LED HCL 2700-6500K 18W 1221lm
incl. endcaps, Install only in protected outdoor areas!
2 mounting clips

Illuminant

LED HCL
EEC A
Colour rendering index (CRI) > 80
MacAdam 3

Dimension

LxWxH: 600x70x100mm
Cut-out for recessed mounting LxWxMt:
605x75x135mm

Surface/Colour

RAL9016 white fine matte finish
aluminium profile

Lens

diffuser polycarbonate LED IP54

Protection rating




IP54 / Protection class I

Connection

230V 50/60Hz
incl. converter DALI

Weight

2,4 kg

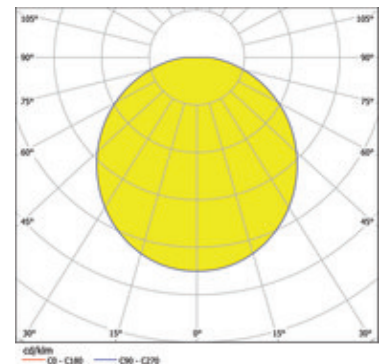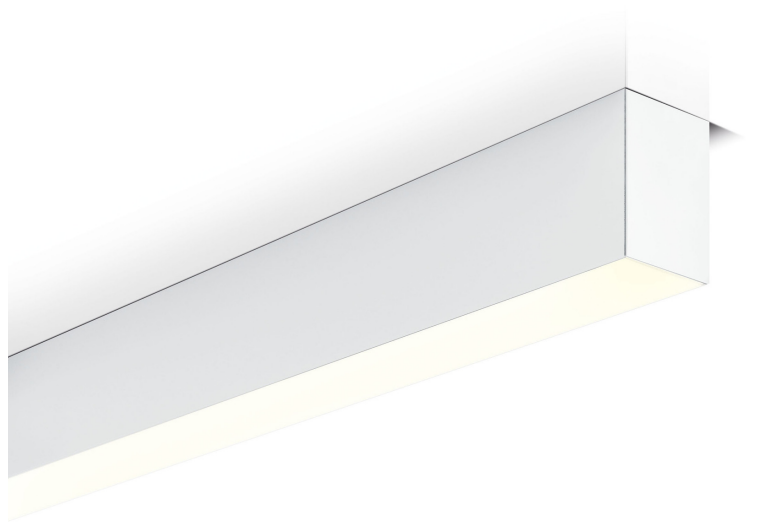

Product-Information

High-class luminaire with LEDs, constructed out of an extruded aluminium section, with a fine structure powder coating in matte white 'RAL9016' for surface mounting or for recessed mounting in false ceilings (thickness 12.5 to 40 mm) with an extra orderable recessed-mount bracket or with an available recessed-mount kit for concrete as an option, designed for direct light emission. Light emission through a satin polycarbonate diffuser for an almost homogeneous emission of light. Endcaps, mounting clips, 5-pin connection terminal and 7-pin feed-through wiring are included. Luminaire equipped with the latest generation of linear LED boards with an efficiency of 68 lm per W, the innovative LED technology produces a luminous flux of minimum 1221 lm with 18 W, colour temperature in tunable white of 2700-6500 K. Dimmable DALI converter included, Colour Rendering Index (CRI) > 80. Small colour tolerance MacAdam 3, rated lifetime of minimum 50.000 h, Energy Efficiency Index (EEI)A. Ingress Protection IP54, Protection Class I. Available with daylight and motion sensor and with emergency lighting for 3 hours. Dimensions LxWxH: 600x70x100 mm, Cut-out for recessed mounting LxWxMt: 605x75x135 mm, Weight: 2,4 kg

