

Item

R33E119-QASIE1830L3S
sinus.quiet recessed frame silver

General

LED LO 3000K 44W 4824lm DALI
acoustic dampener 'Anthracite Melange'
4 mounting brackets

Illuminant

EEI A++ - A
Colour rendering index (CRI) > 80
Blue light hazard RG0 IEC 62471
MacAdam 3

Dimension

DMxH: 1190x082mm
Mounting depth: 115mm
ring section width 86 mm

Surface/Colour

aluminium
powdercoating silver RAL9006 matte

Lens

satin polycarbonat diffuser

Protection rating



IP40 / Protection class I

Connection

230V 50/60Hz
incl. converter DALI

Weight

18,6 kg

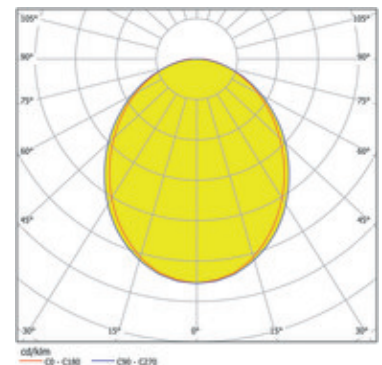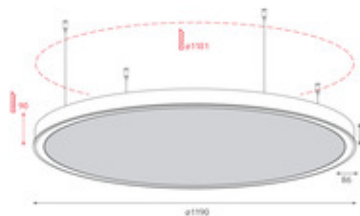

Product-Information

High-class lighting housing in ring design consisting of steel sheet with a fine structure powder coating in silver RAL9006 with a matte finish, with an integrated acoustic module 'Anthracite Melange' for recessed mounting in false ceilings (thickness from 12.5 to 40 mm), designed for direct light emission. as an absorber for the regulation of reverberation time. Installed by 4 mounting brackets. Electrical connection through 5 pins, Light emission through a satin polycarbonate diffuser for an almost homogeneous emission of light. Luminaire equipped with the latest generation of LED boards with an efficiency of 110 lm per W, the innovative LED technology produces a luminous flux of 4824 lm with 44 W, colour temperature of 3000 K. Dimmable DALI converter included. Colour Rendering Index (CRI) > 80, small colour tolerance MacAdam 3, Ingress Protection IP40, Protection Class I, Blue light hazard Risk Group RG = 0 IEC 62471. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Energy Efficiency Index (EEI) A++ - A. Dimensions DMxH: 1190x082 mm, Mounting depth: 115 mm, ring section width 86 mm. Weight: 18,6 kg