

**Item**

S10S100-GDSWC1935H14  
zenit S 3-phase-track light black

**General**

LED HO 3500K 11W 925lm 40°  
rotatable and swiveling  
golden anti-glare cone  
3-phase universal adapter black, length = 204 mm

**Illuminant**

LED HO  
EEC A+  
Colour rendering index (CRI) > 90  
Blue light hazard RG1 IEC 62471  
MacAdam 3

**Dimension**

LxWxH: 100x58x118mm  
DMxH: 0058x118mm

**Surface/Colour**

black  
powder-coated aluminium with fine matte finish

**Lens**

Radiation angle: 40°

**Protection rating**



IP20/Protection class I

**Connection**

230V 50/60Hz  
incl. converter

**Weight**

0,30 kg

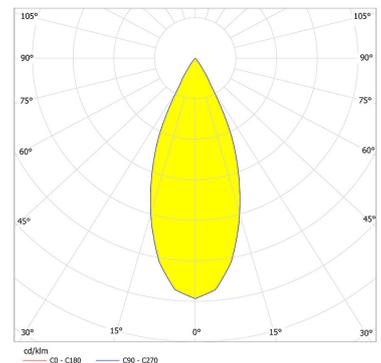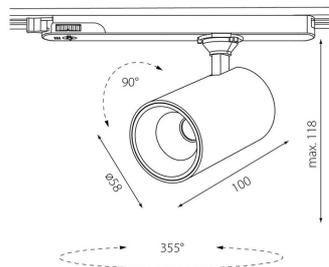

**Product-Information**

Surface-mount 3-phase track LED spotlight constructed out of die-cast aluminium with a fine structure powder coating in matte black and golden anti-glare cone, particularly designed for lighting sales and presentation areas. Latest generation of LED technology with an efficiency of 84 lm per W and a luminous flux of 925 lm with 11 W. Aluminium reflector with facets segments. Emission characteristic of 40°. Replacement of the reflector without any tools with a bayonet fastener. Spotlight swivelling up to 90° rotatable up to 355°. Not suitable for wall mounting. Complete spotlight including 3-phase track adapter (ENEC) in black as in-track-Adapter, with passive cooling. Colour temperature of 3500 K. Converter included. Colour Rendering Index (CRI) > 90, small colour tolerance of MacAdam 3. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], blue light hazard RG1 IEC 62471. Ingress Protection IP20, protection class I. A honeycomb glare protection, an oval spot lens, a clear protective glass or a blur glass is optionable. Dimensions: LxWxH: 100x58x118 mm, DMxH: 0058x118 mm, Weight: 0,3 kg