

**Item**

S10S250-SWSWC1830H16  
zenit L 3-phase-track light black

**General**

LED HO 3000K 30W 3579lm 60°  
rotatable and swiveling  
black anti-glare cone  
3-phase universal adapter black

**Illuminant**

LED HO  
EEC A++  
Colour rendering index (CRI) > 80  
Blue light hazard RG1 IEC 62471  
MacAdam 3

**Dimension**

LxWxH: 250x120x295mm  
DMxH: 0120x295mm

**Surface/Colour**

black  
powder-coated aluminium with fine matte finish

**Lens**

Radiation angle: 60°

**Protection rating**



IP20 / Protection class I

**Connection**

230V 50/60Hz  
incl. converter

**Weight**

1,4 kg

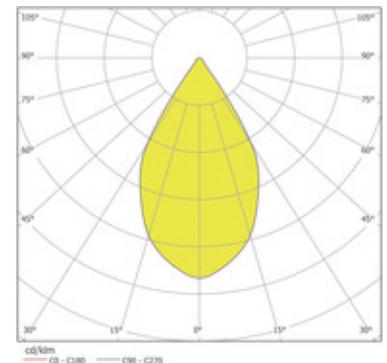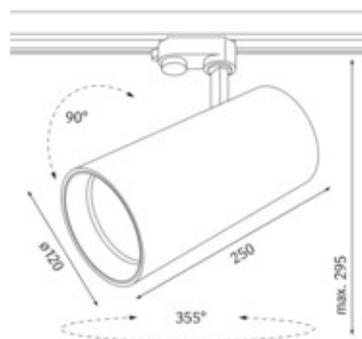

**Product-Information**

Surface-mount 3-phase track LED spotlight constructed out of die-cast aluminium with a fine structure powder coating in matte black and black anti-glare cone, particularly designed for lighting sales and presentation areas. Latest generation of LED technology with an efficiency of 118 lm per W and a luminous flux of 3579 lm with 30 W. Aluminium reflector with facets segments. Emission characteristic of 60°. Replacement of the reflector without any tools with a bayonet fastener. Spotlight swivelling up to 90° rotatable up to 355°. Suitable for monopoint mounting. Not suitable for wall mounting. Complete spotlight including 3-phase track adapter (ENEC) in black as well as electronic converter, with passive cooling. Colour temperature of 3000 K. Converter included. Colour Rendering Index (CRI) > 80, small colour tolerance of MacAdam 3. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], blue light hazard RG1 IEC 62471. Ingress Protection IP20, protection class I. A honeycomb glare protection, an oval spot lens, a clear protective glass or a blur glass is optional. Dimensions: LxWxH: 250x120x295 mm, DMxH: 0120x295 mm, Weight: 1,4 kg