

Item

S10S250-WSWSC1WURLG4
zenit L 3-phase-track light white

General

LED LO 19W 1171lm 40° DALI
rotatable and swiveling
black anti-glare cone, Special LED "Sausage Products"
3-phase-Stucchi/Global Pulse adapter white

Illuminant

LED LO
EEC A
Colour rendering index (CRI) > 80
Blue light hazard RG1 IEC 62471
MacAdam 3

Dimension

LxWxH: 250x120x295mm
DMxH: 0120x295mm

Surface/Colour

white
powder-coated aluminium with fine matte finish

Lens

Radiation angle: 40°

Protection rating



IP20 / Protection class I

Connection

230V 50/60Hz
incl. converter DALI

Weight

1,4 kg

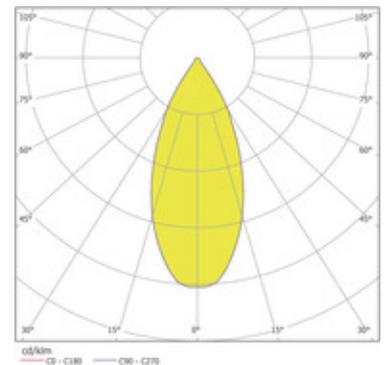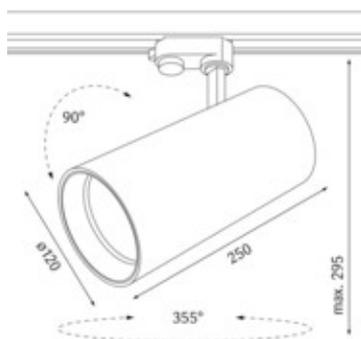

Product-Information

Surface-mount 3-phase track LED spotlight constructed out of die-cast aluminium with a fine structure powder coating in matte white and black anti-glare cone, Special LED "Sausage Products", particularly designed for lighting sales and presentation areas. With a special LED module for an optimum spotlighting of sausage products. Latest generation of LED technology with an efficiency of 62 lm per W and a luminous flux of 1171 lm with 19 W. Aluminium reflector with facets segments. Emission characteristic of 40°. Replacement of the reflector without any tools with a bayonet fastener. Spotlight swivelling up to 90° rotatable up to 355°. Suitable for monopoint mounting. Not suitable for wall mounting. Complete spotlight including 3-phase track adapter (ENEC) in white as well as electronic converter, with passive cooling. Colour temperature of K. Dimmable DALI converter included, compatible with Stucchi/Global pulse. Colour Rendering Index (CRI) > 80, small colour tolerance of MacAdam 3. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], blue light hazard RG1 IEC 62471. Ingress Protection IP20, protection class I. A honeycomb glare protection, an oval spot lens, a clear protective glass or a blur glass is optionable. Dimensions: LxWxH: 250x120x295 mm, DMxH: 0120x295 mm, Weight: 1,4 kg