

Item

S31E168-WSSIC2830L31
shoplight 168 frame Recessed spotlight white - fra

General

LED LO 3000K 2x22W 2x215lm 17° DALI
rotatable, swiveling, protection glass

Illuminant

LED LO
EEC A+
Colour rendering index (CRI) > 80
Blue light hazard RG1 IEC 62471
MacAdam 3

Dimension

LxWxH: 360x202x175mm
Cut-out LxWxMt: 339x180x195mm

Surface/Colour

white - frame silver
powder-coated aluminium with fine matte finish

Lens

Radiation angle: 17°

Protection rating



IP20 / Protection class I

Connection

230V 50/60Hz
incl. converter DALI

Weight

2,4 kg

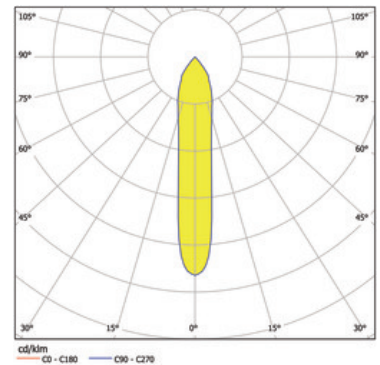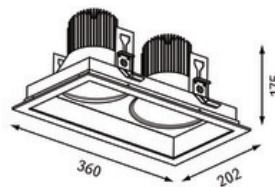

Product-Information

Square recessed spotlight with LED and frame, made of die-cast aluminium powder-coated with fine matte finish. Complete spotlight including reflector and converter. Recessed optics for reduced glare. Faceted reflector made of aluminium, including protective glass. Rotatable and swivelling spotlight. For ceilings ranging from 12.5 to 25mm thick. Emission characteristic spot, medium or flood (17°, 36° or 54°). Spotlight available in different colours: housing frame in white or silver, and housing inner surface in white or black.

