

Item

F48A033-9006C2840L1M
slett surface luminaire di/id silver

General

LED LO 4000K 10W 1100lm
with indirect light emission

Illuminant

LED LO
EEI A+
Colour rendering index (CRI) > 80
MacAdam 3
UGR < 19

Dimension

DMxH: 0330x090mm

Surface/Colour

Material: aluminium
Surface/Colour RAL9006 silver fine matte finish

Lens

Diffuser PMMA microprismatic

Protection rating



IP20 / Protection class I

Connection

230V 50/60Hz
incl. converter

Weight

2,6 kg

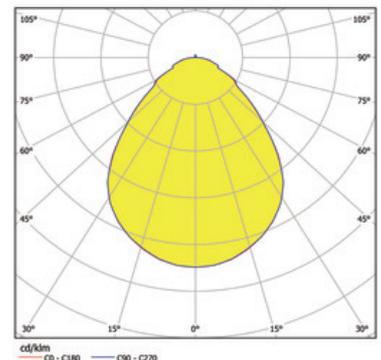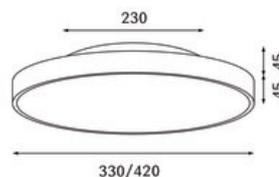

Product-Information

High-class luminaire with LEDs and a round lamp housing in a modern flat design constructed out of seamlessly welded, extruded aluminium with a fine structure in powder coating silver 'RAL9006' matte for surface mounting or with an optionable frame for recessed mounting designed for direct-indirect light emission. Base plate made of aluminium sheet for holding the lamp housing and LED boards, with die-cast aluminium housing attached on the back side for holding the electronics. Electrical connection through 3-pin connection terminal. Direct light emission through a microprismatic diffuser for reduced brightness (LRA), indirect through a satin one, both made of PMMA. Luminaire equipped with the latest generation of LED boards with an efficiency of 110 lm per W, the innovative LED technology produces a luminous flux of 1100 lm with 10 W, colour temperature of 4000 K. Converter included, Unified Glare Rating (UGR) < 19, Colour Rendering Index (CRI) > 80, small colour tolerance MacAdam 3, Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Energy Efficiency Index (EEI) A+. Ingress Protection IP20, Protection Class I. Dimensions DMxH: 0330x090 mm, Weight: 2,6 kg