

### Item

S44E037-DGWSC1HCLX34  
anto+ recessed frame white 376x56 DT6

### General

LED HCL 2700-6500K 15,5W 695lm 45° DALI 12 Spots  
housing white RAL9016 matte  
anti-glare cone gold matte, anti-glare attachment  
gold glossy  
2 mounting brackets

### Illuminant

LED HCL  
EEC A++ - A  
Colour rendering index (CRI) > 90  
Blue light hazard RG1 IEC 62471  
MacAdam 3

### Dimension

LxWxH: 376x56x043mm  
Cut-out LxWxD: 370x49x080mm

### Surface/Colour

profile: aluminium, anti-glare attachment:  
Polycarbonate

### Lens

Lens technology  
Radiation angle: 45°

### Protection rating



IP20 / Protection class I

### Connection

230V 50/60Hz  
incl. converter DALI

### Weight

0,8 kg

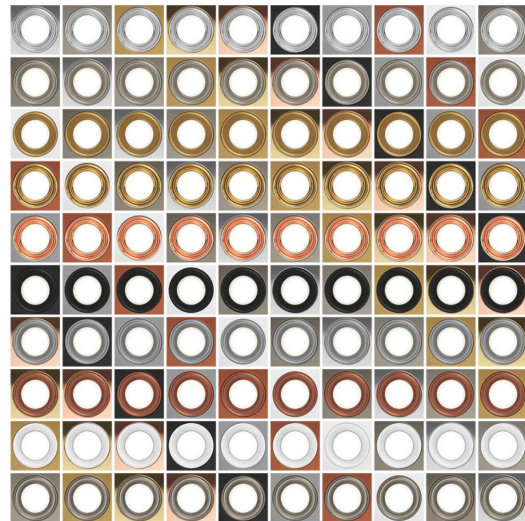

### Product-Information

High-end recessed profile luminaire, casing constructed out of aluminium, anti-glare attachment made of polycarbonate. Luminaire consists of 12 light points with efficient high-power LEDs in the colour combination: anti-glare cone gold matte, anti-glare attachment gold glossy, housing white RAL9016 matte. Unique lens technology and recessed optics. Direct light emission, light geometry symmetric with an emittance angle 'Wide Flood' of 45°. Colour rendering index (CRI) > 90, with an efficiency of 45 lm per W producing a luminous flux of minimum 695 lm with 15,5 W, colour temperature in tunable white of 2700-6500 K. Including a dimmable DALI converter, small colour tolerance MacAdam 3, energy efficiency class according to delegated Commission Regulation (EU) No. 518/2014: A++ - A. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Ingress Protection IP20, Protection Class I. Electrical connection through 7 used pins. Including endcaps and 2 mounting brackets or installation spring(s). Dimensions LxWxH: 376x56x043 mm, Cut-out LxWxD: 370x49x080 mm, Weight: 0,8 kg