

**Item**

S44E037-DKSIC1HCLX3A  
anto+ recessed frame silver asy 376x56 DT6

**General**

LED HCL 2700-6500K 15,5W 704lm DALI 12 Spots  
housing silver RAL9006 matte  
anti-glare cone gold matte, anti-glare attachment  
copper glossy  
2 mounting brackets

**Illuminant**

LED HCL  
EEC A++ - A  
Colour rendering index (CRI) > 90  
Blue light hazard RG1 IEC 62471  
MacAdam 3

**Dimension**

LxWxH: 376x56x043mm  
Cut-out LxWxD: 370x49x080mm

**Surface/Colour**

profile: aluminium, anti-glare attachment:  
Polycarbonate

**Lens**

Lens technology asymmetrical/oval

**Protection rating**



IP20 / Protection class I

**Connection**

230V 50/60Hz  
incl. converter DALI

**Weight**

0,8 kg

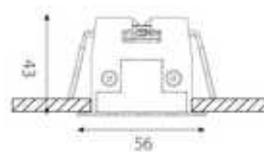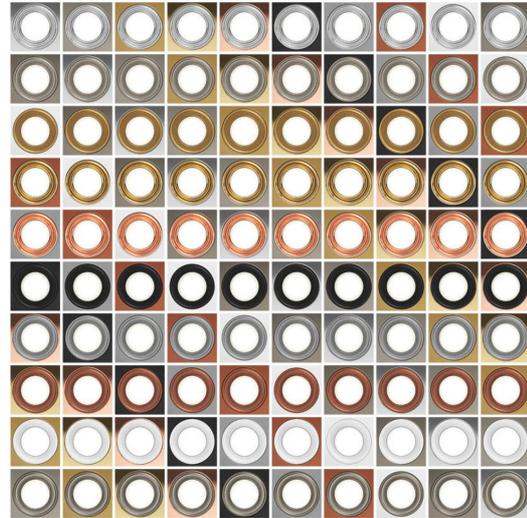

**Product-Information**

High-end recessed profile luminaire, casing constructed out of aluminium, anti-glare attachment made of polycarbonate. Luminaire consists of 12 light points with efficient high-power LEDs in the colour combination: anti-glare cone gold matte, anti-glare attachment copper glossy, housing silver RAL9006 matte. Unique lens technology and recessed optics. Direct light emission, light geometry asymmetric/oval, asymmetrical light control for homogeneous wall illumination when mounted close to the wall or oval light distribution for special requirements/corridor situations. Colour rendering index (CRI) > 90, with an efficiency of 45 lm per W producing a luminous flux of minimum 704 lm with 15,5 W, colour temperature in tunable white of 2700-6500 K. Including a dimmable DALI converter, small colour tolerance MacAdam 3, energy efficiency class according to delegated Commission Regulation (EU) No. 518/2014: A++ - A. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Ingress Protection IP20, Protection Class I. Electrical connection through 7 used pins. Including endcaps and 2 mounting brackets or installation spring(s). Dimensions LxWxH: 376x56x043 mm, Cut-out LxWxD: 370x49x080 mm, Weight: 0,8 kg