

**Item**

P58A060-9005Q1HCLX3S  
pure2 surface luminaire black 600x70

**General**

LED HCL 2700-6500K 18W 1221lm  
incl. endcaps, Install only in protected outdoor areas!  
2 mounting clips

**Illuminant**

LED HCL  
EEC A  
Colour rendering index (CRI) > 80  
MacAdam 3

**Dimension**

LxWxH: 600x70x100mm  
Cut-out for recessed mounting LxWxMt:  
605x75x135mm

**Surface/Colour**

RAL9005 black fine matte finish  
aluminium profile

**Lens**

diffuser polycarbonate LED IP54

**Protection rating**




IP54 / Protection class I

**Connection**

230V 50/60Hz  
incl. converter DALI

**Weight**

2,4 kg

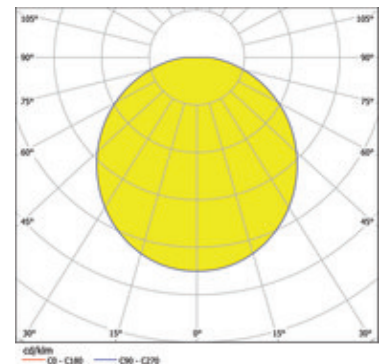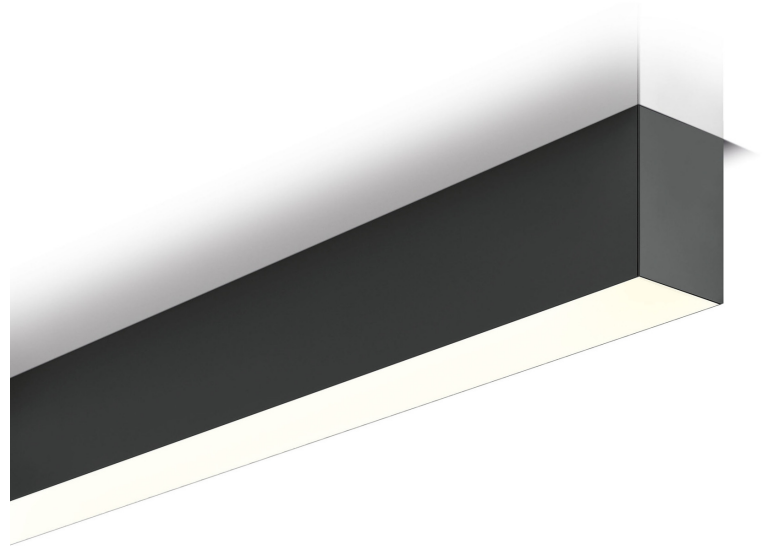

**Product-Information**

High-class luminaire with LEDs, constructed out of an extruded aluminium section, with a fine structure powder coating in matte black 'RAL9005' for surface mounting or for recessed mounting in false ceilings (thickness 12.5 to 40 mm) with an extra orderable recessed-mount bracket or with an available recessed-mount kit for concrete as an option, designed for direct light emission. Light emission through a satin polycarbonate diffuser for an almost homogeneous emission of light. Endcaps, mounting clips, 7-pin connection terminal and 7-pin feed-through wiring are included. Luminaire equipped with the latest generation of linear LED boards with an efficiency of 68 lm per W, the innovative LED technology produces a luminous flux of minimum 1221 lm with 18 W, colour temperature in tunable white of 2700-6500 K. Dimmable DALI converter included, Colour Rendering Index (CRI) > 80. Small colour tolerance MacAdam 3, rated lifetime of minimum 50.000 h, Energy Efficiency Index (EEI)A. Ingress Protection IP54, Protection Class I. Available with daylight and motion sensor and with emergency lighting for 3 hours. Dimensions LxWxH: 600x70x100 mm, Cut-out for recessed mounting LxWxMt: 605x75x135 mm, Weight: 2,4 kg

