

Item

S44A024-YRSIC1930M1A
anto+ surface silver asy 247x44

General

LED MO 3000K 14W 749lm 08 Spots
housing silver RAL9006 matte
anti-glare cone grey matte, anti-glare attachment
copper matte
for recessed version 2 mounting brackets required

Illuminant

LED MO
EEC A++ - A
Colour rendering index (CRI) > 90
Blue light hazard RG1 IEC 62471
MacAdam 3

Dimension

LxWxH: 247x44x082mm
Cut-out LxWxD: 252x49x100mm

Surface/Colour

profile: aluminium, anti-glare attachment:
Polycarbonate

Lens

Lens technology asymmetrical/oval

Protection rating


IP20 / Protection class I

Connection

230V 50/60Hz
incl. converter

Weight

0,7 kg

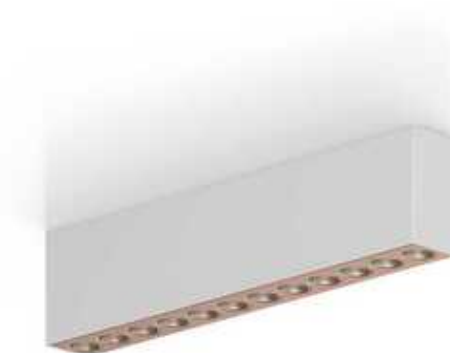

Product-Information

High-end surface-mounted profile luminaire, casing constructed out of aluminium, anti-glare attachment made of polycarbonate. Luminaire consists of 8 light points with efficient high-power LEDs in the colour combination: anti-glare cone grey matte, anti-glare attachment copper matte, housing silver RAL9006 matte. Unique lens technology and recessed optics. Direct light emission, light geometry asymmetric/oval, asymmetrical light control for homogeneous wall illumination when mounted close to the wall or oval light distribution for special requirements/corridor situations. Colour rendering index (CRI) > 90, with an efficiency of 53 lm per W producing a luminous flux of 749 lm with 14 W, colour temperature of 3000 K. Including a converter, small colour tolerance MacAdam 3, energy efficiency class according to delegated Commission Regulation (EU) No. 518/2014: A++ - A. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Ingress Protection IP20, Protection Class I. Electrical connection through 3 used pins. Also suitable for semi-recessed mounting using separately available components (mounting brackets). Including endcaps, for recessed version 2 mounting brackets required. Dimensions LxWxH: 247x44x082 mm, Cut-out for recessed mounting LxWxD: 252x49x100 mm, Weight: 0,7 kg