

**Item**

S44A036-GRSWC1927M3A  
anto+ surface black asy 367x44

**General**

LED MO 2700K 19W 1463lm DALI 12 Spots  
housing black RAL9005 matte  
anti-glare cone gold glossy, anti-glare attachment  
copper matte  
for recessed version 2 mounting brackets required

**Illuminant**

LED MO  
EEC A++ - A  
Colour rendering index (CRI) > 90  
Blue light hazard RG1 IEC 62471  
MacAdam 3

**Dimension**

LxWxH: 367x44x082mm  
Cut-out LxWxD: 372x49x100mm

**Surface/Colour**

profile: aluminium, anti-glare attachment:  
Polycarbonate

**Lens**

Lens technology asymmetrical/oval

**Protection rating**




IP20 / Protection class I

**Connection**

230V 50/60Hz  
incl. converter DALI

**Weight**

1,0 kg

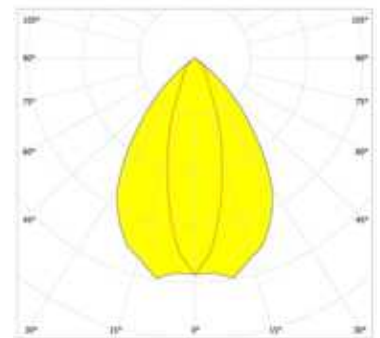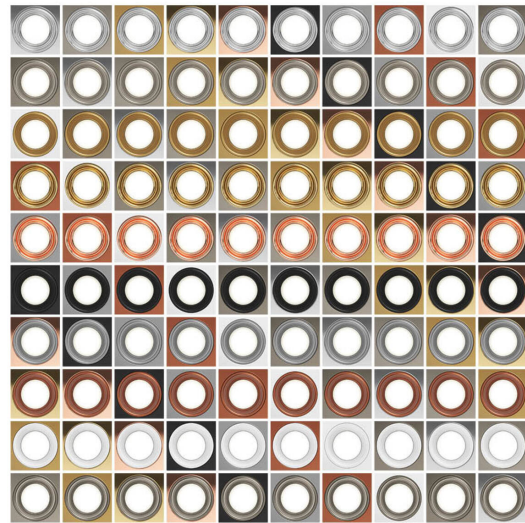

**Product-Information**

High-end surface-mounted profile luminaire, casing constructed out of aluminium, anti-glare attachment made of polycarbonate. Luminaire consists of 12 light points with efficient high-power LEDs in the colour combination: anti-glare cone gold glossy, anti-glare attachment copper matte, housing black RAL9005 matte. Unique lens technology and recessed optics. Direct light emission, light geometry asymmetric/oval, asymmetrical light control for homogeneous wall illumination when mounted close to the wall or oval light distribution for special requirements/corridor situations. Colour rendering index (CRI) > 90, with an efficiency of 77 lm per W producing a luminous flux of 1463 lm with 19 W, colour temperature of 2700 K. Including a dimmable DALI converter, small colour tolerance MacAdam 3, energy efficiency class according to delegated Commission Regulation (EU) No. 518/2014: A++ - A. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Ingress Protection IP20, Protection Class I. Electrical connection through 5 used pins. Also suitable for semi-recessed mounting using separately available components (mounting brackets). Including endcaps, for recessed version 2 mounting brackets required. Dimensions LxWxH: 367x44x082 mm, Cut-out for recessed mounting LxWxD: 372x49x100 mm, Weight: 1,0 kg