

Item

S44E037-GKSIC1HCLX3A
anto+ recessed frame silver asy 376x56 DT6

General

LED HCL 2700-6500K 15,5W 914lm DALI 12 Spots
housing silver RAL9006 matte
anti-glare cone gold glossy, anti-glare attachment
copper glossy
2 mounting brackets

Illuminant

LED HCL
EEC A++ - A
Colour rendering index (CRI) > 90
Blue light hazard RG1 IEC 62471
MacAdam 3

Dimension

LxWxH: 376x56x043mm
Cut-out LxWxD: 370x49x080mm

Surface/Colour

profile: aluminium, anti-glare attachment:
Polycarbonate

Lens

Lens technology asymmetrical/oval

Protection rating



IP20 / Protection class I

Connection

230V 50/60Hz
incl. converter DALI

Weight

0,8 kg

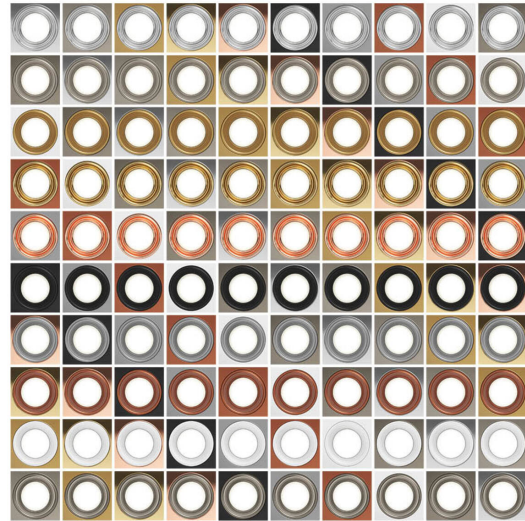

Product-Information

High-end recessed profile luminaire, casing constructed out of aluminium, anti-glare attachment made of polycarbonate. Luminaire consists of 12 light points with efficient high-power LEDs in the colour combination: anti-glare cone gold glossy, anti-glare attachment copper glossy, housing silver RAL9006 matte. Unique lens technology and recessed optics. Direct light emission, light geometry asymmetric/oval, asymmetrical light control for homogeneous wall illumination when mounted close to the wall or oval light distribution for special requirements/corridor situations. Colour rendering index (CRI) > 90, with an efficiency of 59 lm per W producing a luminous flux of minimum 914 lm with 15,5 W, colour temperature in tunable white of 2700-6500 K. Including a dimmable DALI converter, small colour tolerance MacAdam 3, energy efficiency class according to delegated Commission Regulation (EU) No. 518/2014: A++ - A. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Ingress Protection IP20, Protection Class I. Electrical connection through 7 used pins. Including endcaps and 2 mounting brackets or installation spring(s). Dimensions LxWxH: 376x56x043 mm, Cut-out LxWxD: 370x49x080 mm, Weight: 0,8 kg