

**Item**

T59T061-SWSWC2930X7M  
xerxes Floor lamp black 615x325

**General**

sensor LED 3000K 78W 8230lm  
3000mm black supply cable with two-pin earthed plug

**Illuminant**

LED  
EEI A++ -A  
Colour rendering index (CRI) > 90  
MacAdam 3  
UGR < 13

**Dimension**

LxWxH: 615x325x046/1945mm

**Surface/Colour**

Material: aluminium/steel sheet fine structure in powder coating matte  
Surface black

**Lens**

PMMA microprismatic  
PMMA clear (id)

**Protection rating**




IP20 / Protection class I

**Connection**

220-240/AC  
incl. Converter for light control with sensors as a Stand-alone solution

**Weight**

13,7 kg

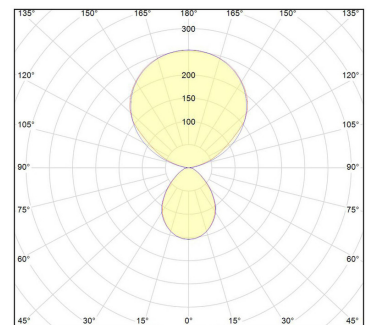

**Product-Information**

High-class LED floor lamp designed for direct-indirect light emission, in a flat, rectangular design made of extruded aluminium fine structure powder coating in matte black. Foot plate made of steel sheet. Direct-indirect emission of light in a 1:3 proportion. Inclined LED boards on the indirect side for optimal lighting of working space. Direct light emission through a light guiding plate (LGP) with a PMMA microprism for a homogeneous light emission and reduced glare with a Unified Glare Rating (UGR) < 13 with an efficiency of 106 lm per W. Indirect light emission through a clear PMMA diffuser. Luminaire equipped with the latest generation of LED boards with a Colour Rendering Index (CRI) > 90, a small colour tolerance MacAdam 3, Rated lifetime of minimum 50.000 h [according to EU decree No. 1194/2012], Energy Efficiency Index (EEI) A++ -A. Ingress Protection IP20, Protection Class I. Colour temperature of 3000 K. Dimmable converter for light control with a daylight and motion sensor as a Stand-alone solution included. Dimmable with on / off push button in the range 10 % to 100 %. Dimensions: Luminaire 615x325x46 mm (LxWxH), foot plate 300x500x4 mm (LxWxH), Lamp total height 1950 mm. Weight: 13,7 kg