

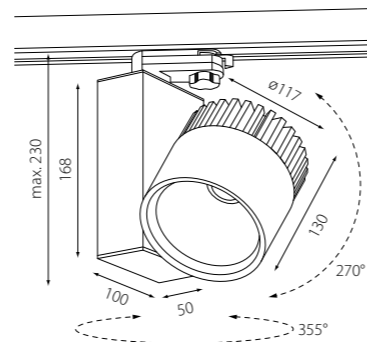


meteor

Strahler | Spotlight | Projecteur | Proiettore

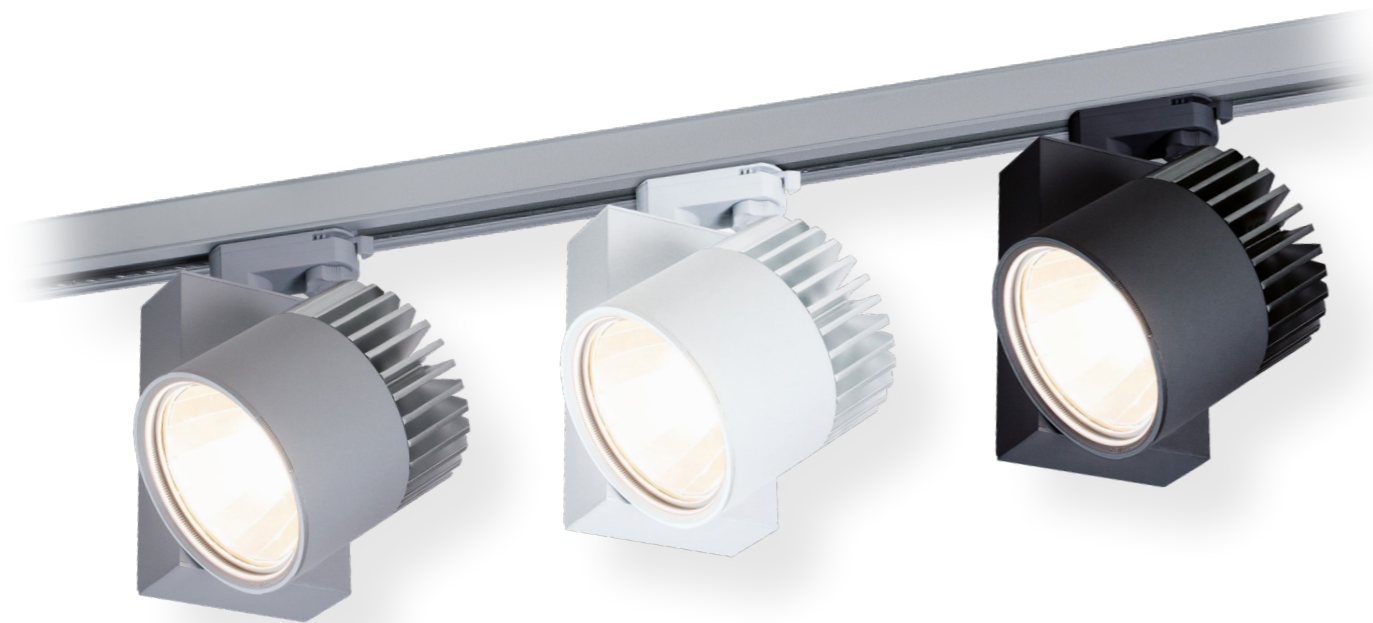

Reflektortausch werkzeuglos möglich.
Passive Kühlung. Komplettrahler inklusive Reflektor und Konverter.
Replacement of the reflector without any tools.
Passive cooling. Complete spotlight including reflector and converter.
Remplacement du réflecteur sans outil.
Refroidissement passif. Projecteur complet incluant réflecteur et convertisseur.
Sostituzione del riflettore senza utensili.
Raffreddamento passivo. Proiettore completo incluso riflettore e convertitore.

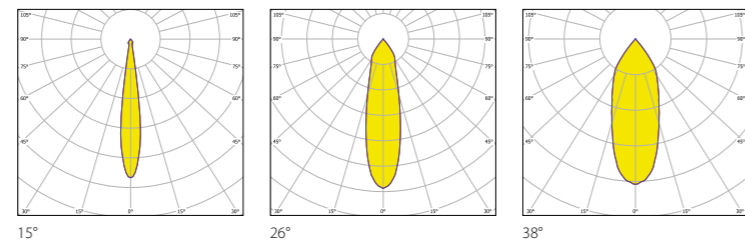

A++ A 230V IP20 R_a>80/90 up to L90/50.000h MacAdam 3 DALI

<p>LED</p> <p>2700K, 3000K, 3500K, 4000K Food & Fashion, dynamic white</p> <hr/> <p>up to 148 lm/W</p> <hr/> <p>R_a>80/90, MacAdam 3</p> <hr/> <p>non-dim / DALI</p> <hr/> <p>Blue light hazard: RG≤1 IEC 62471</p>	<p>Optic</p> <p>Reflector: 15°, 26°, 38°</p> <hr/> <p>Flexibility</p> <p>rotatable up to 355°, adjustable up to 270°</p> <hr/> <p>Lifetime</p> <p>up to L90/50.000h</p>	<p>Options</p> <p>Honeycomb glare protection</p>	<p>Housing</p> <p>powder coated</p> <p>silver </p> <p>white </p> <p>black </p>
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------	---------------------------------------------------------------------------------------

meteor

S03S172-1 C1 2 3 4 5

1 Gehäusefarbe | Housing colour | Couleur du luminaire | Colore profilo

weiß white blanc bianco	WSWS
schwarz black noir nero	SWSW
silber silver argent argento	SISI

2 Farbtemperatur | Colour temperature | Température de couleur | Temperatura colore

LF830 3000K	830
LF840 4000K	840
LF927 2700K	927
LF930 3000K	930
LF935 3500K	935
LF940 4000K	940
LF932 3250K Fashion	FAS
Backwaren Bakery goods Boulangerie Prodotti da forno	BAC
Fleisch Meat Boucherie Carne	FLE
Wurstwaren Sausage products Charcuterie Salumi	WUR
Fisch Fish Poissonnerie Pesche	FIS
Gemüse Vegetables Légumes Verdura	FRU
dynamic white	HCL

3 Output

low output	L
medium output	M
high output	H
very high output	V
dynamic white	X

4 non-dim, DALI, dynamic white

non-dim	1
DALI Eutrac 3 / dynamic white	3
DALI Global pulse / dynamic white	G

5 Reflektor | Reflector | Réflecteur | Riflettore

15°	1
26°	2
38°	3

Beispiel | Example | Exemple | Esempio
black, LF935, very high output, DALI, 38°
S03S172-SWSWC1935V33

Luminous Flux (lm)	low output				medium output				high output				very high output			
	15°	15°	15°	15°	26°	26°	26°	26°	38°	38°	38°	38°	38°	38°	38°	38°
LF830 3000K	2587	3245	3849	4734	2729	3428	4071	5021	2727	3427	4072	5027	2727	3427	4072	5027
LF840 4000K	2726	3426	4072	5028	2880	3626	4317	5348	2874	3617	4305	5330	2874	3617	4305	5330
LF927 2700K	2104	2645	3144	3883	2230	2802	3330	4111	2222	2794	3322	4104	2222	2794	3322	4104
LF930 3000K	2220	2798	3335	4140	2392	3008	3577	4421	2387	3003	3571	4415	2387	3003	3571	4415
LF935 3500K	2288	2890	3454	4306	2461	3107	3711	4622	2653	3277	3821	4551	2653	3277	3821	4551
LF940 4000K	2311	2907	3458	4276	2487	3124	3711	4579	2482	3121	3711	4588	2482	3121	3711	4588
FAS (LF932 3250K)	1932	2473	2996	3828	2031	2596	3140	4001	2027	2593	3138	4003	2027	2593	3138	4003
BAC	1306	1664	2008	2545	1377	1748	2099	2642	1376	1748	2102	2648	1376	1748	2102	2648
FLE	1310	1671	2017	2561	1379	1753	2109	2663	1378	1752	2108	2661	1378	1752	2108	2661
WUR	1263	1614	1952	2486	1327	1690	2036	2579	1323	1686	2034	2579	1323	1686	2034	2579
FIS	2048	2621	3176	4058	2153	2752	3328	4241	2149	2748	3326	4243	2149	2748	3326	4243
FRU	1935	2439	2908	3610	2031	2548	3023	3720	2019	2534	3006	3698	2019	2534	3006	3698

Luminous Flux (lm)	15°	26°	38°
dynamic white	2811 lm	2989 lm	2966 lm

Weight (kg)
meteor 1,4 kg

System Power (W)	low output	medium output	high output	very high output	dynamic white
meteor	20W	26W	31W	41W	39W



Optionales Zubehör | Optional accessory | Accessoire optionnel | Accessori opzionali

Blendschutz-Wabenraster | Honeycomb glare protection | Filtre anti-éblouissement nid d'abeilles | Filtro anti-abbagliamento a nido d'ape

S03-BLE-99

