

Item

S03E180-SISIC1FASL12
meteor flip recessed spotlight silver

General

LED LO 3250K 19,5W 2031lm 26°
Product in phase-out, available while stocks last!
rotatable, swiveling, passive cooling, protection glass
Special LED "Fashion"

Illuminant

LED LO
EEC A+
Colour rendering index (CRI) > 90

Dimension

DM: 0180mm
Cut-out DMxD: 170x180mm

Surface/Colour

silver
powder-coated aluminium with fine matte finish

Lens

Radiation angle: 26°

Protection rating

IP20 / Protection class I



Connection

230V 50/60Hz
incl. converter

Weight

1,3 kg

PHASE-OUT

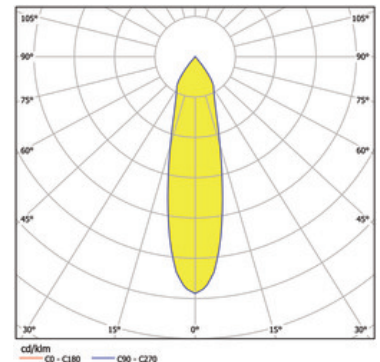

Product-Information

Recessed LED spotlight constructed out of die-cast aluminium in powder coating silver, particularly designed for lighting sales and presentation areas. With a special LED module for an optimum spotlighting of fashion. Latest generation of LED technology producing a luminous flux of 2031 lm with 19,5 W. Faceted aluminium reflector with protective glass. Emittance angle 'medium' of 26°. Spotlight rotatable up to 359°. Extendable spotlight with head swivelling up to 90°. Reflector replacement without any tool thanks to the bayonet fastener. Passive cooling through heat sink made of extruded aluminium profile. Complete spotlight including reflector and converter, colour Rendering Index (CRI) > 90, rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Energy Efficiency Index (EEI) A+. Ingress Protection IP20, Protection Class I. A honeycomb glare protection is an option. Dimensions: DM: 0180 mm, Cut-out DMxD: 170x180 mm, Weight: 1,3 kg