

**Item**

S31E168-WSSIC2840H31  
shoplight 168 frame Recessed spotlight white - fra

**General**

LED HO 4000K 2x30W 2x2877lm 17° DALI  
rotatable, swiveling, protection glass

**Illuminant**

LED HO  
EEC A+  
Colour rendering index (CRI) > 80  
Blue light hazard RG1 IEC 62471  
MacAdam 3

**Dimension**

LxWxH: 360x202x175mm  
Cut-out LxWxMt: 339x180x195mm

**Surface/Colour**

white - frame silver  
powder-coated aluminium with fine matte finish

**Lens**

Radiation angle: 17°

**Protection rating**



IP20 / Protection class I

**Connection**

230V 50/60Hz  
incl. converter DALI

**Weight**

2,4 kg

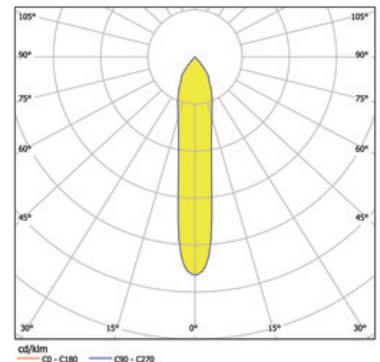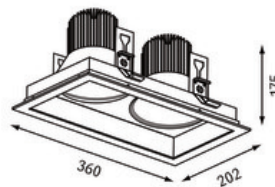

**Product-Information**

Square recessed spotlight with LED and frame, made of die-cast aluminium powder-coated with fine matte finish. Complete spotlight including reflector and converter. Recessed optics for reduced glare. Faceted reflector made of aluminium, including protective glass. Rotatable and swivelling spotlight. For ceilings ranging from 12.5 to 25mm thick. Emission characteristic spot, medium or flood (17°, 36° or 54°). Spotlight available in different colours: housing frame in white or silver, and housing inner surface in white or black.

