

Item

S44A054-RBSWC1927M11
anto+ surface black 547x44

General

LED MO 2700K 29W 2151lm 15° 18 Spots
housing black RAL9005 matte
anti-glare cone copper matte, anti-glare attachment
silver glossy
for recessed version 2 mounting brackets required

Illuminant

LED MO
EEC A++ - A
Colour rendering index (CRI) > 90
Blue light hazard RG1 IEC 62471
MacAdam 3

Dimension

LxWxH: 547x44x082mm
Cut-out LxWxD: 552x49x100mm

Surface/Colour

profile: aluminium, anti-glare attachment:
Polycarbonate

Lens

Lens technology
Radiation angle: 15°

Protection rating



IP20 / Protection class I

Connection

230V 50/60Hz
incl. converter

Weight

1.3 kg

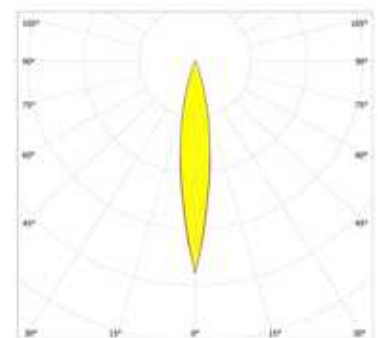

Product-Information

High-end surface-mounted profile luminaire, casing constructed out of aluminium, anti-glare attachment made of polycarbonate. Luminaire consists of 18 light points with efficient high-power LEDs in the colour combination: anti-glare cone copper matte, anti-glare attachment silver glossy, housing black RAL9005 matte. Unique lens technology and recessed optics. Direct light emission, light geometry symmetric with an emittance angle 'Spot' of 15°. Colour rendering index (CRI) > 90, with an efficiency of 74 lm per W producing a luminous flux of 2151 lm with 29 W, colour temperature of 2700 K. Including a converter, small colour tolerance MacAdam 3, energy efficiency class according to delegated Commission Regulation (EU) No. 518/2014: A++ - A. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Ingress Protection IP20, Protection Class I. Electrical connection through 3 used pins. Also suitable for semi-recessed mounting using separately available components (mounting brackets). Including endcaps, for recessed version 2 mounting brackets required. Dimensions LxWxH: 547x44x082 mm, Cut-out for recessed mounting LxWxD: 552x49x100 mm, Weight: 1.3 kg