

**Item**

S44F024-RGWSC1HCLX34  
anto+ recessed frameless white 244x44 DT6

**General**

LED HCL 2700-6500K 11,5W 469lm 45° DALI 08 Spots  
housing white RAL9016 matte  
anti-glare cone copper matte, anti-glare attachment  
gold glossy  
mounting frame

**Illuminant**

LED HCL  
EEC A++ - A  
Colour rendering index (CRI) > 90  
Blue light hazard RG1 IEC 62471  
MacAdam 3

**Dimension**

LxWxH: 244x44x043mm  
Cut-out LxWxD: 253x52x080mm

**Surface/Colour**

profile: aluminium, anti-glare attachment:  
Polycarbonate

**Lens**

Lens technology  
Radiation angle: 45°

**Protection rating**



IP20 / Protection class I

**Connection**

230V 50/60Hz  
incl. converter DALI

**Weight**

0,8 kg

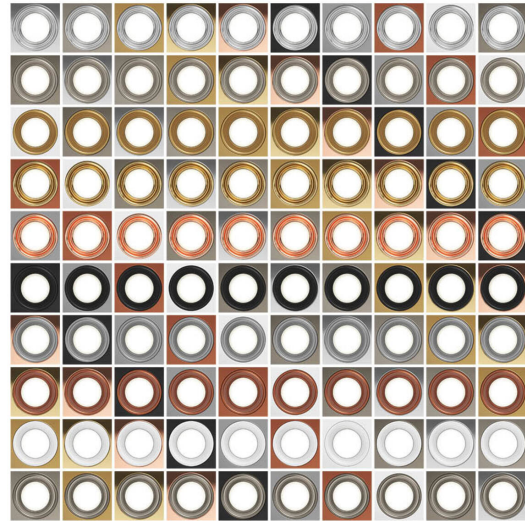

**Product-Information**

High-end frameless recessed profile luminaire, casing constructed out of aluminium, anti-glare attachment made of polycarbonate. Luminaire consists of 8 light points with efficient high-power LEDs in the colour combination: anti-glare cone copper matte, anti-glare attachment gold glossy, housing white RAL9016 matte. Unique lens technology and recessed optics. Direct light emission, light geometry symmetric with an emittance angle 'Wide Flood' of 45°. Colour rendering index (CRI) > 90, with an efficiency of 40 lm per W producing a luminous flux of minimum 469 lm with 11,5 W, colour temperature in tunable white of 2700-6500 K. Including a dimmable DALI converter, small colour tolerance MacAdam 3, energy efficiency class according to delegated Commission Regulation (EU) No. 518/2014: A++ - A. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Ingress Protection IP20, Protection Class I. Electrical connection through 7 used pins. Including endcaps mounting frame. Dimensions LxWxH: 244x44x043 mm, Cut-out LxWxD: 253x52x080 mm, Weight: 0,8 kg