

Item

S44E037-GPSWC1940L1A
anto+ recessed frame black asy 376x56

General

LED LO 4000K 13W 1128lm 12 Spots
housing black RAL9005 matte
anti-glare cone gold glossy, anti-glare attachment
silver matte
2 mounting brackets

Illuminant

LED LO
EEC A++ - A
Colour rendering index (CRI) > 90
Blue light hazard RG1 IEC 62471
MacAdam 3

Dimension

LxWxH: 376x56x043mm
Cut-out LxWxD: 370x49x080mm

Surface/Colour

profile: aluminium, anti-glare attachment:
Polycarbonate

Lens

Lens technology asymmetric

Protection rating


IP20 / Protection class I

Connection

230V 50/60Hz
incl. converter

Weight

0,7 kg

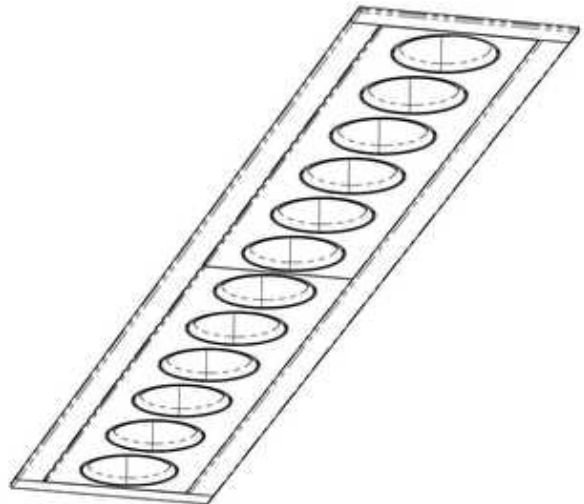

Product-Information

High-end recessed profile luminaire, casing constructed out of aluminium, anti-glare attachment made of polycarbonate. Luminaire consists of 12 light points with efficient high-power LEDs in the colour combination: anti-glare cone gold glossy, anti-glare attachment silver matte, housing black RAL9005 matte. Unique lens technology and recessed optics. Direct light emission, light geometry asymmetric. Colour rendering index (CRI) > 90, with an efficiency of 87 lm per W producing a luminous flux of 1128 lm with 13 W, colour temperature of 4000 K. Including a converter, small colour tolerance MacAdam 3, energy efficiency class according to delegated Commission Regulation (EU) No. 518/2014: A++ - A. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Ingress Protection IP20, Protection Class I. Electrical connection through 3 used pins. Including endcaps and 2 mounting brackets or installation spring(s). Dimensions LxWxH: 376x56x043 mm, Cut-out LxWxD: 370x49x080 mm, Weight: 0,7 kg