

**Item**

S44A024-YRSIC1927M14  
anto+ surface silver 247x44

**General**

LED MO 2700K 14W 708lm 45° 08 Spots  
housing silver RAL9006 matte  
anti-glare cone grey matte, anti-glare attachment  
copper matte  
for recessed version 2 mounting brackets required

**Illuminant**

LED MO  
EEC A++ - A  
Colour rendering index (CRI) > 90  
Blue light hazard RG1 IEC 62471  
MacAdam 3

**Dimension**

LxWxH: 247x44x082mm  
Cut-out LxWxD: 252x49x100mm

**Surface/Colour**

profile: aluminium, anti-glare attachment:  
Polycarbonate

**Lens**

Lens technology  
Radiation angle: 45°

**Protection rating**



IP20 / Protection class I

**Connection**

230V 50/60Hz  
incl. converter

**Weight**

0,7 kg

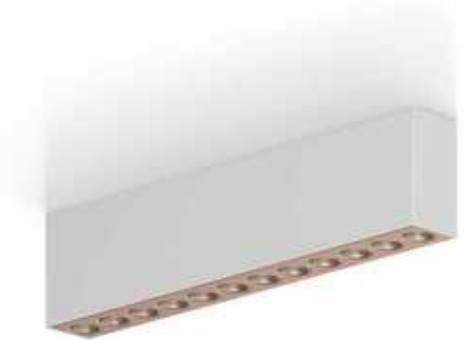

**Product-Information**

High-end surface-mounted profile luminaire, casing constructed out of aluminium, anti-glare attachment made of polycarbonate. Luminaire consists of 8 light points with efficient high-power LEDs in the colour combination: anti-glare cone grey matte, anti-glare attachment copper matte, housing silver RAL9006 matte. Unique lens technology and recessed optics. Direct light emission, light geometry symmetric with an emittance angle 'Wide Flood' of 45°. Colour rendering index (CRI) > 90, with an efficiency of 50 lm per W producing a luminous flux of 708 lm with 14 W, colour temperature of 2700 K. Including a converter, small colour tolerance MacAdam 3, energy efficiency class according to delegated Commission Regulation (EU) No. 518/2014: A++ - A. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Ingress Protection IP20, Protection Class I. Electrical connection through 3 used pins. Also suitable for semi-recessed mounting using separately available components (mounting brackets). Including endcaps, for recessed version 2 mounting brackets required. Dimensions LxWxH: 247x44x082 mm, Cut-out for recessed mounting LxWxD: 252x49x100 mm, Weight: 0,7 kg