

Item

S44F006-CKSIC1930H13
anto+ recessed frameless silver 64x44

General

LED HO 3000K 5,8W 320lm 30° 02 Spots
housing silver RAL9006 matte
anti-glare cone chrome matte, anti-glare attachment
copper glossy
mounting frame

Illuminant

LED HO
EEC A++ - A
Colour rendering index (CRI) > 90
Blue light hazard RG1 IEC 62471
MacAdam 3



Dimension

LxWxH: 64x44x043mm
Cut-out LxWxD: 73x52x080mm

Surface/Colour

profile: aluminium, anti-glare attachment:
Polycarbonate

Lens

Lens technology
Radiation angle: 30°

Protection rating




IP20 / Protection class I

Connection

230V 50/60Hz
incl. converter

Weight

0,2 kg

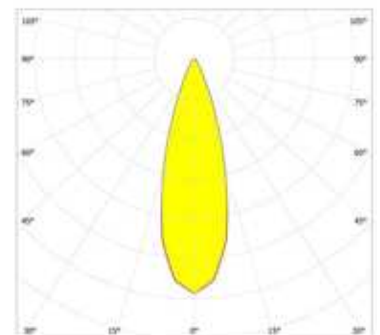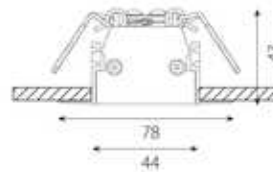

Product-Information

High-end frameless recessed profile luminaire, casing constructed out of aluminium, anti-glare attachment made of polycarbonate. Luminaire consists of 2 light points with efficient high-power LEDs in the colour combination: anti-glare cone chrome matte, anti-glare attachment copper glossy, housing silver RAL9006 matte. Unique lens technology and recessed optics. Direct light emission, light geometry symmetric with an emittance angle 'Medium' of 30°. Colour rendering index (CRI) > 90, with an efficiency of 55 lm per W producing a luminous flux of 320 lm with 5,8 W, colour temperature of 3000 K. Including a converter, small colour tolerance MacAdam 3, energy efficiency class according to delegated Commission Regulation (EU) No. 518/2014: A++ - A. Rated lifetime of minimum 60.000 h [according to EU decree No. 1194/2012], Ingress Protection IP20, Protection Class I. Electrical connection through 3 used pins. Including endcaps mounting frame. Dimensions LxWxH: 64x44x043 mm, Cut-out LxWxD: 73x52x080 mm, Weight: 0,2 kg